

AMR SERIES

Hydropneumatic tanks for booster sets

- Replaceable bladder (potable water)
- Galvanized threaded connection
- Min. / Max. temperature: -10°C + 100°C
- Pre-charge: 1.5 bar
- External finish: epoxy powder coating (red color)


Models without feet 8 - 10 - 16 Bar

Weight Kg.	Code	Model	Capacity (Lt)	Max Pressure (Bar)	Dimensions		R Water connection
					Ø D (mm)	H (mm)	
2	01005013	5 AMR	5	10	200	245	3/4"
2	01005014	5 AMR	5	10	200	245	1"
2,5	01008021	8 AMR	8	10	200	350	1"
4	01015021	15 AMR	15	10	270	320	1"
4,5	01020021	20 AMR	20	10	270	425	1"
9	01035021	35 AMR	35	10	360	485	1"
10	01050021	50 AMR	50	10	360	620	1"
13	01050251	50 AMR	50	16	360	620	1"
4,5	01025051	24 AMR-E	24	8	350	390	3/4"
4,5	01025061	24 AMR-E	24	8	350	390	1"



Models with feet 8 - 10 Bar

Weight Kg.	Code	Model	Capacity (Lt)	Max Pressure (Bar)	Dimensions		R Water connection
					Ø D (mm)	H (mm)	
10	01035241	35 AMR-P	35	10	360	615	1"
12	01050241	50 AMR-P	50	10	360	750	1"
16	03080241	80 AMR-P	80	10	450	750	1"
18	03100031	100 AMR-P	100	10	450	850	1"
18	03100041	100 AMR-P-A	100	10	450	875	1 1/4"
25	03150801	150 AMR-B90 (M/F)	150	10	485	1060	1 1/4"
42	03200801	200 AMR-B90 (M/F)	200	10	550	1135	1 1/4"
55	03300801	300 AMR-B160 (M/F)	300	10	650	1180	1 1/4"
71	03500801	500 AMR-B160 (M/F)	500	10	750	1450	1 1/2"
78	03700501	700 AMR-B160 (M/F)	700	8	750	1750	1 1/2"

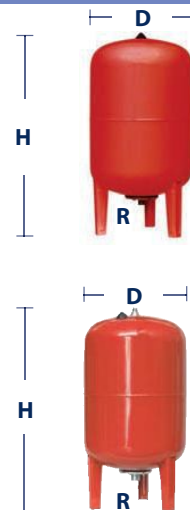

Horizontal models with support 10 Bar

Weight Kg.	Code	Model	Capacity (Lt)	Max Pressure (Bar)	Dimensions			R Water connection
					Ø D (mm)	L (mm)	H (mm)	
6	01020281	20 AMR-S	20	10	270	420	295	1"
12	01050281	50 AMR-S	50	10	360	620	390	1"
16	03080261	80 AMR-S	80	10	450	625	480	1"
18	03100211	100 AMR-S	100	10	450	750	480	1"

